## TUFFALOY PLATEN-MOUNTED HOLDERS



## **PM HOLDERS**

TUFFALOY PM holders may be mounted directly to presstype welder platens, or they can be used as components of special weld fixturing. They come in two sizes, which match standard T-slot spacings (either of which can be furnished to hold any of the four standard tips: 4, 5, 6 or 7 RW). The smaller holder is for use on RWMA Size 1 welders, which have the 3-1/2" spacing. The larger one is for the Size 2 and 3 welders, which have the 5- and 6-inch spacing.

Big, half-inch mounting bolts may be used to assure good conductivity. The holders may be used one-toone or in multiples closely bunched. PM holders make special fixture building easy. They can be bolted to a fixture or back-up base as easily as to a platen. They are compact and have self-contained coolant systems.

S	TANDARD TIP PM HOLDERS						
RW Tip	Size 1 (Small)		Size 2 (Large)				
Socket	Descrip- tion	Part No.	Descrip- tion	Part No.			
4	4560	350-4560	4570	350-4570			
5	4561	350-4561	4571	350-4571			
6	4562	350-4562	4572	350-4572*			
7	4563	350-4563	4573	350-4573			

Size 2 PM Holder (3/4-in. mounting bolts)

 FOR THREADED ELECTRODES


 Thread Size
 Size 1
 Size 2

 5/8-11
 350-4580
 350-4590

 3/4-10
 350-4581
 350-4591

 FOR THREADED ADAPTERS

Thread Size	Size 1	Size 2
7/8-14	350-4582	350-4592
1-12	350-4583	350-4593

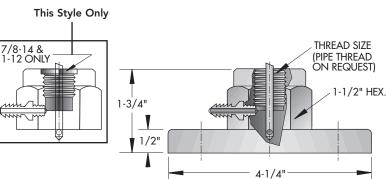

See adapters page 16

\*Item not normally stocked

PM Holders	Holder Size	For 1" Dia. Electrodes		For 1-1/2" Dia. Electrodes	
T-Slot Spacing		Description	Part No.	Description	Part No.
3-1/2	1PM	4515	350-4515		
5 & 6	2PM	4525	350-4525	4526	350-4526

